

Features

- ▶ Typical wavelength, 637nm
- ▶ Stabilized optical power 2.5mW
- ▶ Single supply voltage, 5V,12V DC (custom)
- ▶ **Line generator : Cylindrical glass lens**
- ▶ **Precisely adjustable line thickness**
- ▶ **3 elements optic structure**
(2 lens fixed, 1 lens mobile)
- ▶ Wire length : 30cm(standard) or custom
- ▶ Laser class : 1M
- **Option : Bracket & Power supply.**

Specification

Optical

Optical power(mW)	2.5 (Tc=25°C)
LD power(mW)	5 (Max)
Wavelength(nm)	637 ±8
Focus Beam Wid(mm)	< 0.1(at 300mm)
Collimated Beam Wid(mm)	< 1 (at 1m)
Fan Angle (°)	10,15,30,46,80,90, 120
Line Pattern	Accurate Straight
Beam Quality	TEM00
Beam intensity Pattern	Gaussian
LD Pin Connection	Case Ground

Electrical

Operating voltage(DC V)	5
Operating current(mA)	50 (Max)
Drive circuit	APC
Operating Temp.(°C)	-10 ~ +50
Storage Temp.(°C)	-40 ~ +85


Mechanical

Weight(g)	20 ± 0.5
Dimensions(mm)	12φ X 68
Operating lifetime(h)	30,000~50,000 (@RT)
Housing material	Aluminum

Description

The FNS series laser diode module combines laser diode technology, 3 elements lens optics, and sophisticated electronics within a slim and light aluminum anodized housing. Specially, 3 lens structure compensates line beam's curve & unbalance and dot beam's accurate focused point.

Drawings

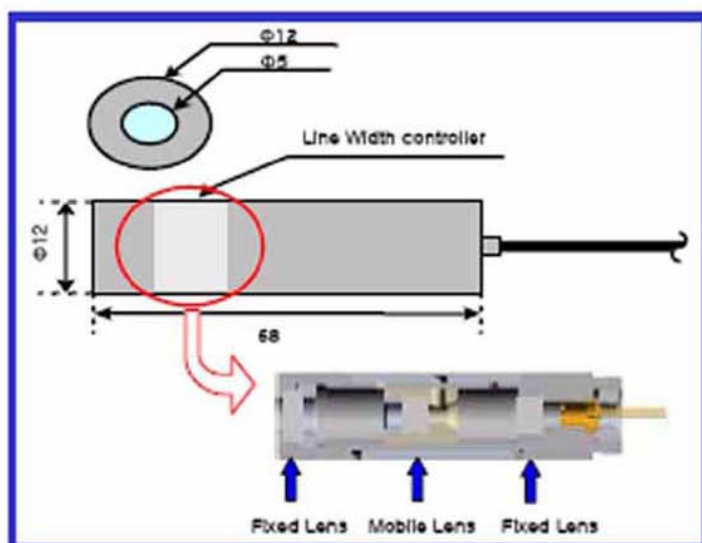

* Range of fan angle

Symbol	Angle	Line length [mm] (distance 1m)	
		Perpendicular	Inclined at45°
1D	16°	250	500
3D	30°	600	1200
4D	46°	830	2000
6D	60°	1180	3500
8D	80°	2000	About 5000
12D	120°	3400	About 8000



Features

- ▶ Typical wavelength, 637nm
- ▶ Stabilized optical power 2.5mW
- ▶ Single supply voltage, 5V DC
- ▶ Line generator : Cylindrical glass lens & Aspheric lens
- ▶ Adjustable line thickness
- ▶ Digital Modulation : ~ 10 kHz (optional)
- ▶ Analog Modulation : ~ 100 kHz (optional)
- ▶ Wire length : 30cm(standard) or custom
- ▶ Laser class : 1M
- ◆ Option : Bracket & Power supply.

Specification

Optical

Optical power(mW)	2.5 (Tc=25°C)
LD power(mW)	5 (Max)
Wavelength(nm)	637 ±8
Focused Beam Width(mm)	< 0.2 (at 30cm)
Collimated Beam Wid.(mm)	< 1 (at 1m)
Fan Angle (°)	10,15,30,45,60,90, 120
Line Pattern	Accurate Straight
Beam Quality	TEM00
Beam intensity Pattern	Gaussian
LD Pin Connection	Case Ground

Electrical

Operating voltage(DC V)	5 ± 5%
Operating current(mA)	50 (Max)
Drive circuit	APC
Operating Temp.(°C)	-10 ~ +50
Storage Temp.(°C)	-40 ~ +85


Mechanical

Weight(g)	18 ± 0.5
Dimensions(mm)	12Φ X 56
Operating lifetime(h)	30,000~50,000 (@RT)
Housing material	Aluminum

Description

The FNSS series laser diode module combines laser diode technology and sophisticated electronics within a slim and light aluminum anodized housing. Applications include a measurement, positioning, lighting, alignment, guidelines, pointing, switching, leveling, and machine vision etc. Useful in a variety of medical, industrial, and scientific instrumentation, as well as general R&D work.

Drawings

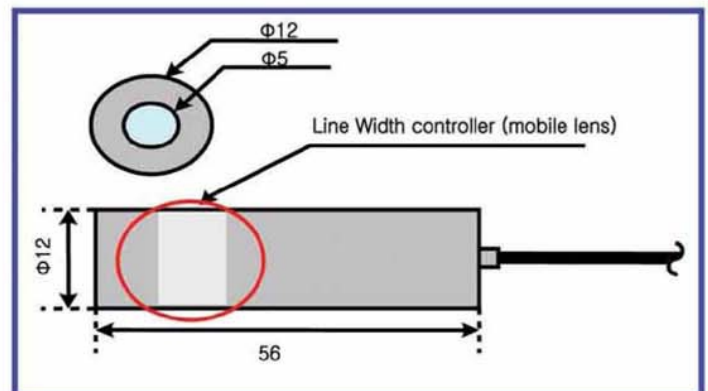

* Range of fan angle

Symbol	Angle	Line length [mm] (distance 1m)	
		Perpendicular	Inclined at45°
1D	15°	250	500
3D	30°	500	1200
4D	45°	830	2000
6D	60°	1160	3500
9D	90°	2000	About 5000
12D	120°	3400	About 8000

